



## Description

The rack-mounted expansion module allows the TELSEC® 2000RM (p/n 150618) or TELSEC® 1500WM (p/n 150617) to expand to an additional 32 inputs (analog or digital) and 16 digital outputs. The unit fits in a standard telephony 19" or 23" rack. This expansion unit is easy to install and configure, allowing the end-user to increase the alarm and control points with little effort.

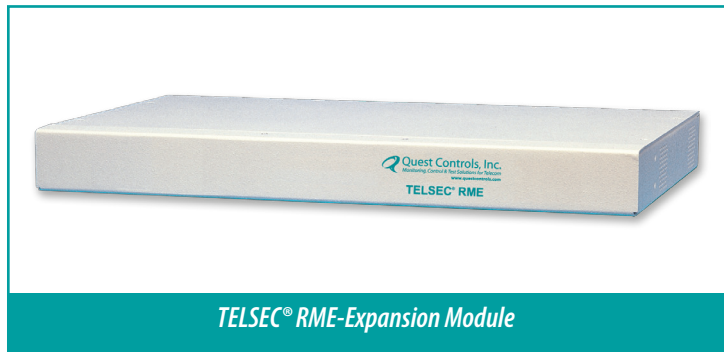

TELSEC® RME-Expansion Module

## Specifications

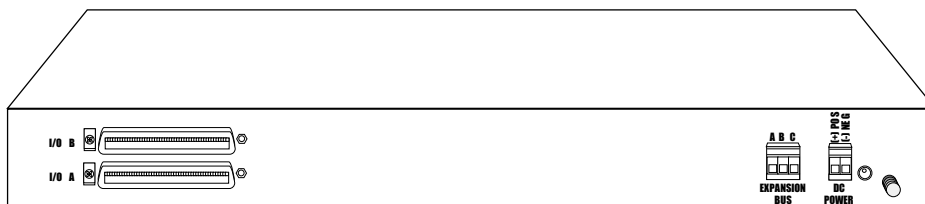

Rear View

<b>Part Number</b>	150640
<b>Inputs 32</b>	0-5 VDC, 4-20 mA or Wet/Dry Contact Closures. 16 Outputs, 16 Form A Contact Closures.
<b>Electrical</b>	+24 or -48 VDC 1 A max. Optional 120/220 VAC, 60Hz, 0.5 A
<b>Terminals</b>	Two (2) 50 PIN Amphenol connectors for outputs, discrete and analog inputs. Plug-in terminals for power and networking.
<b>Environmental</b>	Operating temperature 0° to 140°F (-18° to 60°C) Storage temperature -40° to 250°F (-40° to 121°C) 0-95% RH Non-condensing.
<b>Dimensions</b>	17" W x 10.5" D x 1.75" H (432 x 267 x 45mm)
<b>Shipping Weight</b>	4 lb (1.8 kg)
<b>Warranty</b>	1 year

[www.questcontrols.com](http://www.questcontrols.com)

Tel: (941) 729-4799, Fax: (941) 729-5480

208 9th Street Drive West • Palmetto, Florida 34221

