


# Interconnect Cable

P/N 300705 Series

## Description

The 25 pair, 24 gauge, Prestolite Cable is used to connect the TELSEC® system to the wiring block on the Control Interface Module (CIM). The cable is designed with two (2) Amphenol® connectors, one at each end for direct termination to the wiring block and/or the CIM and the TELSEC® product. One cable supports 8 digital outputs and 16 universal inputs.

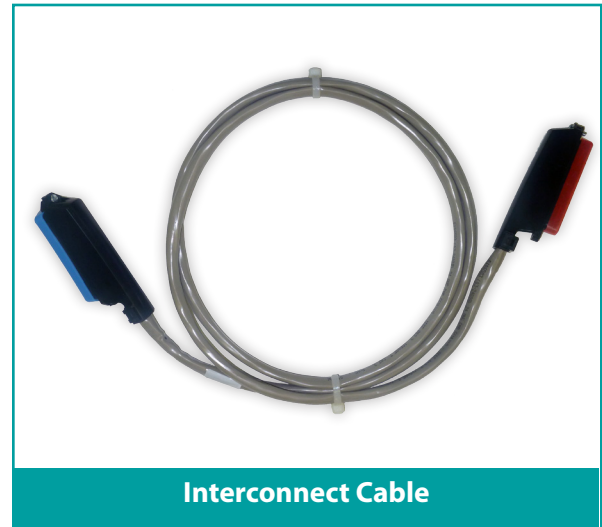

## Specifications

|                   |   |
|-------------------|---|
| <b>Cable</b>      | 25 pair, 24 Ga, Prestolite Copper Cable or equivalent |
| <b>Connectors</b> | 50 POS. Male/Female 90° tapered, slide on             |
| <b>Support</b>    | Each cable supports 16 inputs and 8 outputs           |
| <b>Warranty</b>   | 90 Days   |

| <b>Part Number</b> | <b>Cable Length</b> |
|--------------------|---------------------|
| <b>300705</b>      | 5 ft (1.5 m)        |
| <b>300705-15</b>   | 15 ft (4.5 m)       |
| <b>300705-25</b>   | 25 ft (7.5 m)       |
| <b>300705-50</b>   | 50 ft (15 m)        |

[www.questcontrols.com](http://www.questcontrols.com)

Tel: (941) 729-4799, Fax: (941) 729-5480

208 9th Street Drive West • Palmetto, Florida 34221

